



# FB Serie (FB210)

NO	Item	Material
1	Pump body	cast iron
2	Motor bracket	aluminium
3	Impeller	stainless steel 304
4	Mechanical seal	ceramic / graphite
5	Motor shaft	stainless steel 304
6	Liquid temperature	brass impeller: 0 - 90 °C
7	Operating pressure	max 5.6 bar (FB210)
8	2 pole induction motor	1~ 230 V-50Hz with thermal protection
9	Insulation class	F
10	Protection degree	IP44

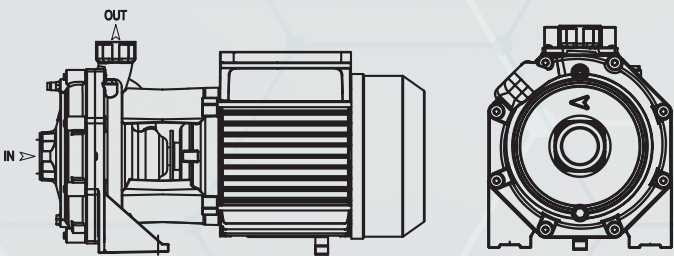

<b>Q (l/min):</b> 10 - 140		<b>H.Max (m):</b> 55	
<b>HP:</b> 2	<b>kW:</b> 1.5	<b>V:</b> 220	<b>A:</b> 11.2
<b>µF:</b> 50	<b>Cl:</b> F	<b>IP:</b> 44	<b>Hz:</b> 50
<b>Size:</b> 1" x 1¼"	<b>RPM:</b> 2850	<b>T max liquid:</b> 90 °C	
Continuous Duty		Overload protector Yes: <input checked="" type="checkbox"/> No: <input type="checkbox"/>	

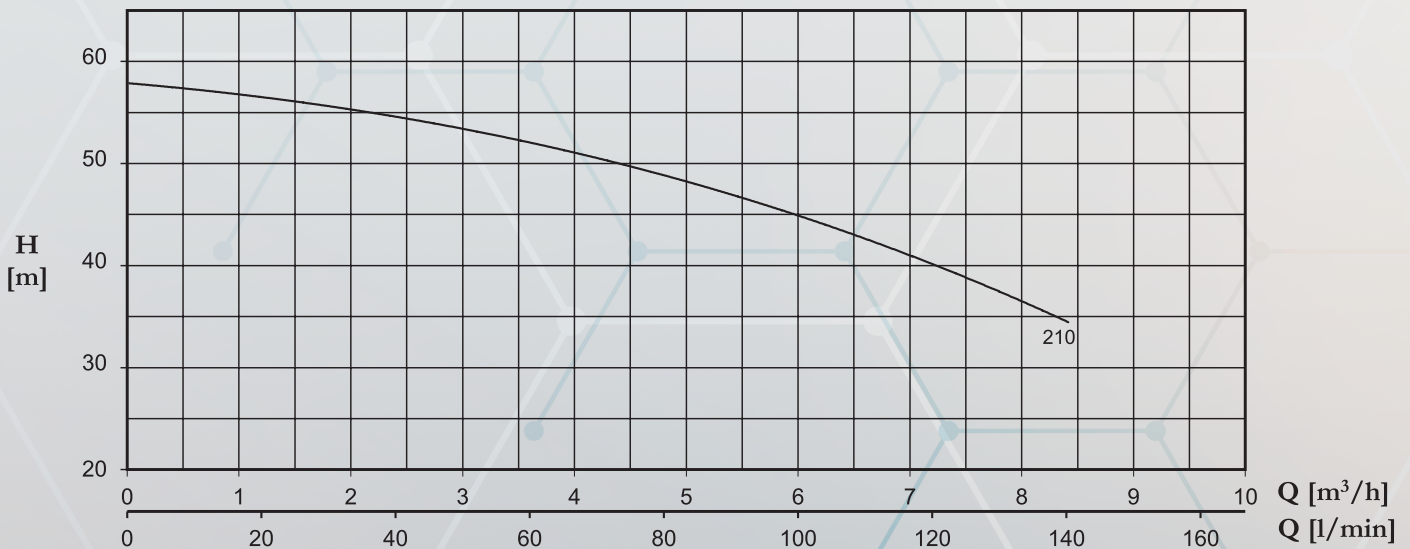

Model	P2		P1 (kW)	AMPERE	Q (m³/h - l/min)									
					0,6	1,2	1,8	2,4	3,6	4,8	6	7,2	8,4	
1~	(HP)	(kW)	1~	1~	10	20	30	40	60	80	100	120	140	
				1x230V 50 Hz	H (m)									
FB210	2	1,5	2,6	11,5	56,9	56	55	54	51	48	44	39	34	