



FS Serie (FS200)

NO	Item	Material
1	Pump body	cast iron
2	Motor bracket	aluminium
3	Impeller	cast iron
4	Mechanical seal	ceramic / graphite
5	Motor shaft	stainless steel 304
6	Liquid temperature	brass impeller: 0 - 90 °C
7	Operating pressure	max 1.3 bar (FS200)
8	2 pole induction motor	1~ 230 V-50Hz with thermal protection
9	Insulation class	F
10	Protection degree	IP44

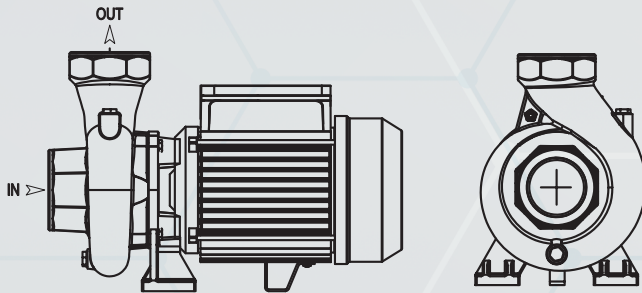

Q (l/min): 100 - 900		H.Max (m): 13	
HP: 2	kW: 1.5	V: 220	A: 10
µF: 50	Cl: F	IP: 44	Hz: 50
Size: 2" x 2"	RPM: 2850	T max liquid: 90 °C	
Continuous Duty		Overload protector Yes: <input checked="" type="checkbox"/> No: <input type="checkbox"/>	

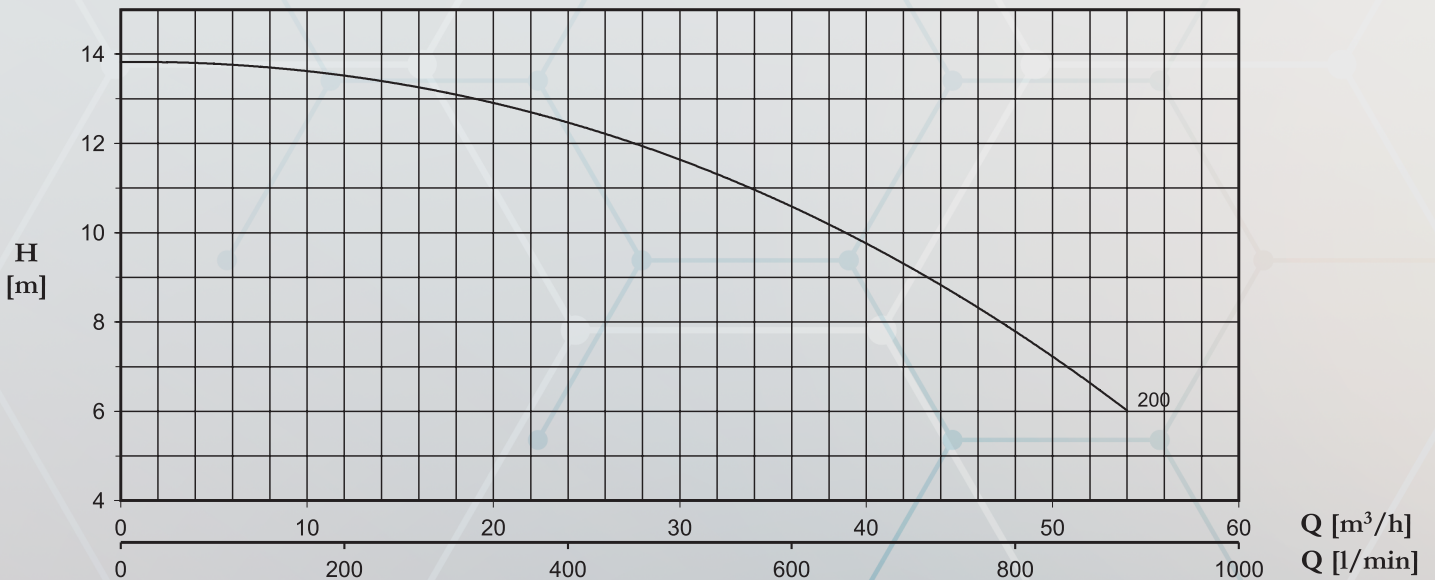

Model	P2		P1 (kW)	AMPERE	Q (m³/h - l/min)										
					1~	0	6	12	18	24	30	36	42	48	54
1~	(HP)	(kW)	1~	1x230V 50 Hz	H (m)										
					2	1.5	2,10	10	13.8	13.8	13.6	13.1	12.4	11.6	10.6